



dipott[®]
timeless pots

ALUMINUM PLANTERS



Product description

Aluminum planters are made of at least 3mm thick Aluminum. Aluminum is light, strong, durable and resistant to corrosion. The upper edge is reversed twice, which gives them a strong and timeless appearance. As standard these planters are equipped with 15mm high feet, so the planter is raised slightly off the ground and the water can leave through the drainage holes that these planters have.

Once constructed the planters get the following treatments:

1. Roughing of the material for a proper bonding
2. Powder coated with a strong adhesive primer
3. Finished with a scratch resistant coloured coating

SPECIFICATIONS

General information

Our planters consist out of:

- Feet or legs
- Material thickness: min. 3 mm
- Drainage holes
- Reinforcements against deformation
- 5 year warranty (descending)

Colours

Stock colours RAL 7021, RAL 9016.

Our planters are available in almost any RAL colour (start-up costs apply).

IMPORTANT

Points of attention

- All packaging materials must immediately be removed from the products.
- Drilling / grinding in the material is not permitted.
- As standard planters are not watertight.
- Our planters are not suitable to be moved once filled.


Maintenance

- Clean annually by removing dirt using clean tap water, clean Aluminum with our Adezz Cleaner and protector set.
Note! Do not use a high-pressure cleaner or abrasive sponge.
- Maintenance products are sold by us (page 4).

PLACEMENT

PLACEMENT

1. Provide a flat, solid surface. If not done carefully, it can create tension in the product which can result in damage to the product.
2. If desired, place an overflow pipe in the designated place at the bottom of the planter to create a water reservoir.
3. Reinforcements in planters are essential for the construction and dimensional stability of the planter. Reinforcements must never be removed!
4. Always provide sufficient breathing space (minimum 1 cm) around the planters to prevent moisture trapping.

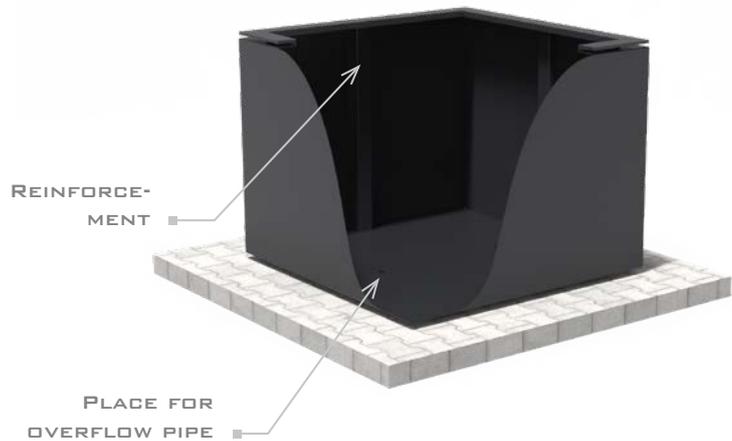


PLANTING ADVICE

5. Fill the planter with a layer of hydro grains about 10cm high. Place a moisture-permeable anti-root cloth over the hydro grains.

Note! Raise the cloth at the edges at least 10 cm for an ideal effect.

6. Cover the anti-root cloth with a layer of airy soil mixture adapted to the planting to be applied.

Note! The soil in the planter should never be tamped down, this can cause damage to the planter.

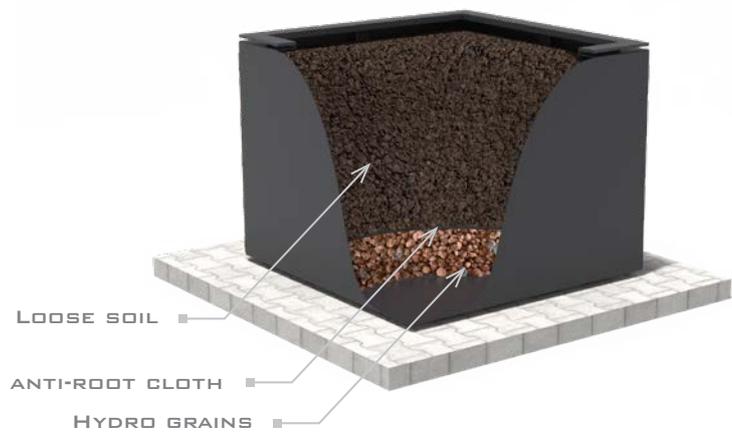

ALUMINUM PLANTERS

MODELS

For a complete overview of all our products and specifications, please visit www.dipott.com.



DUB



TUBE (COATED STEEL)



EXTEND



BOTAN



FACET



DOMUS



MORE



TONIC



TOPIC



DRUM



BOCCA (COATED STEEL)



BOXER



YORK

ACCESSORIES

ACCESSORIES

All our accessories meet the highest standards and are a highly suitable addition to our products. Visit www.dipott.com for a complete overview of our accessories.



CLEANER & PROTECTOR

We recommend cleaning our products at least twice a year. For optimal results, use the ADEZZ BIO Cleaner & Protector. Always read the descriptions on the packaging carefully before use.



DESCALER

We recommend the use of ADEZZ BIO Descaler + to remove limescale from your products. Always read the directions on the packaging carefully before use.



OVERFLOW PIPE

Overflow pipes provide a water buffer at the bottom of the planter and fit into the standard drainage holes, making them easy to install.